


T4730 External



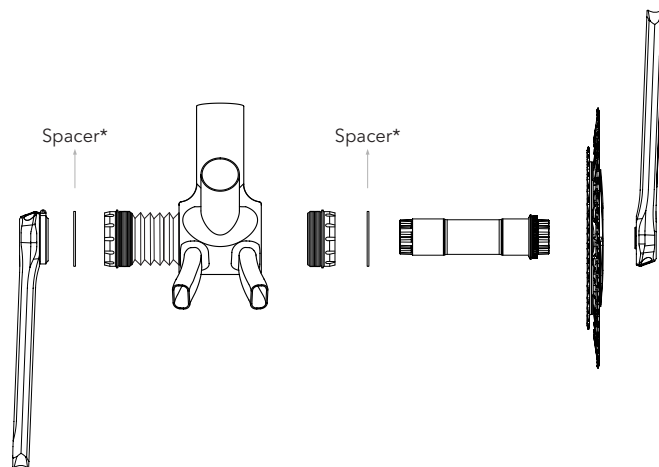


| | Steel | Ceramic |
|---------------------------------|-------|---------|
| Weight (Spring sleeve included) | 103 g | 97 g |

Axle compatibility



| | |
|------|----------------------------------|
| ROAD | 30 mm (Standard / Offset) |
| MTB | 30 mm (L 135 / L 141 / L 144 mm) |

Frame compatibility

| | ROAD | MTB |
|--|--|--|
|  |  |  |
| T47 | 68 mm | 73 mm |

- Read the spacer chart

T4730 Internal

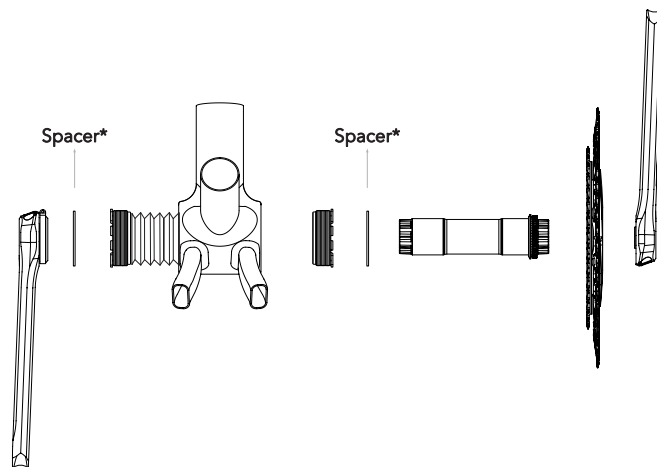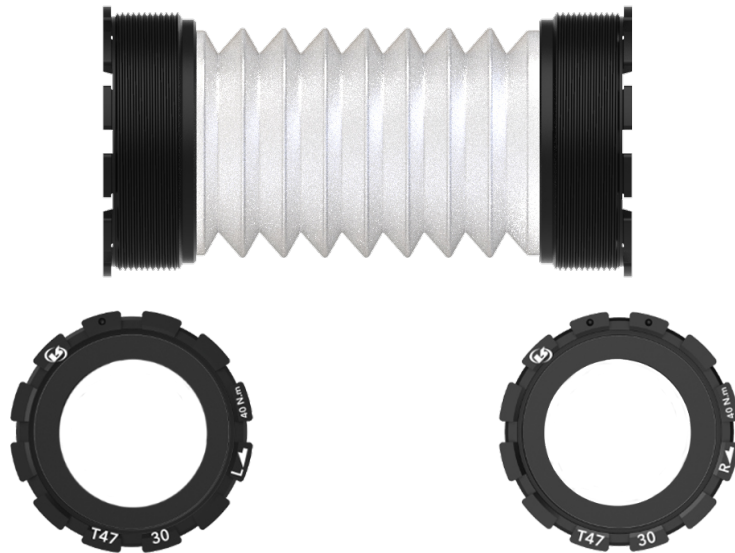




| | Steel | Ceramic |
|---------------------------------|-------|---------|
| Weight (Spring sleeve included) | 89 g | 83 g |

Axle compatibility



| | |
|------|----------------------------------|
| ROAD | 30 mm (Standard / Offset) |
| MTB | 30 mm (L 135 / L 141 / L 144 mm) |

Frame compatibility

| | ROAD | MTB |
|--|--|--|
|  |  |  |
| T47 | 85.5 mm 86.5 mm | 89.5 mm 92 mm |

- Read the spacer chart

T4724 External

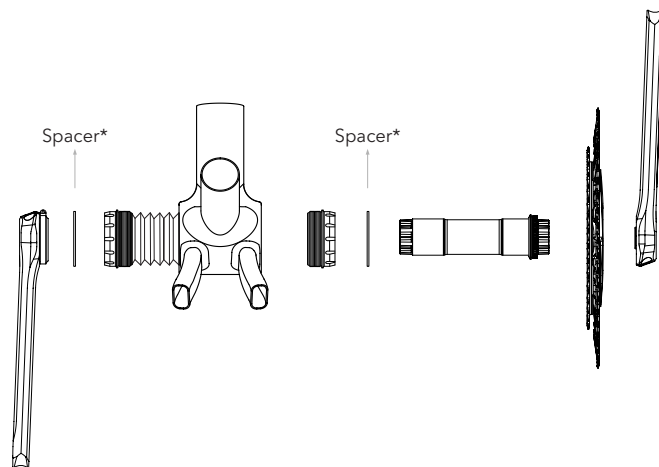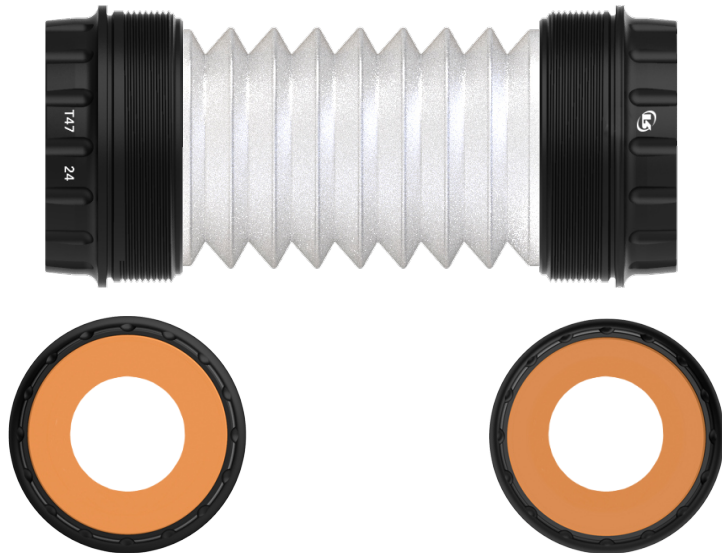




| | Steel | Cer.mic |
|---------------------------------|-------|---------|
| Weight (Spring sleeve included) | 120 g | 113,5 g |

Axle compatibility



| | |
|------|------------------------------------|
| ROAD | 24 mm |
| MTB | 24 mm (Shimano® Cranks compatible) |

Frame compatibility

| | ROAD | MTB |
|--|--|--|
|  |  |  |
| T47 | 68 mm | 73 mm |

- Read the spacer chart

T4724 Internal

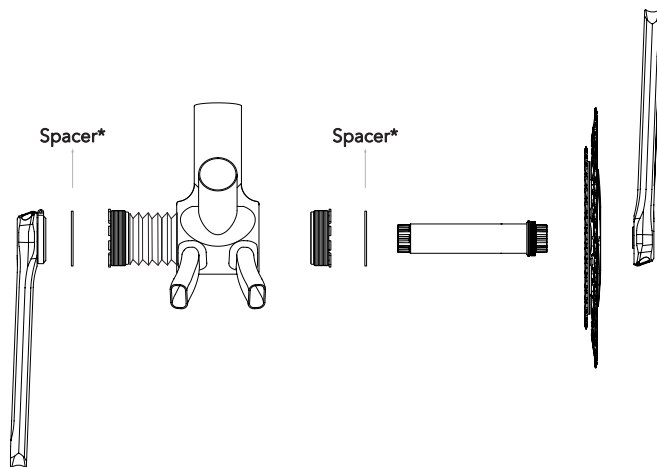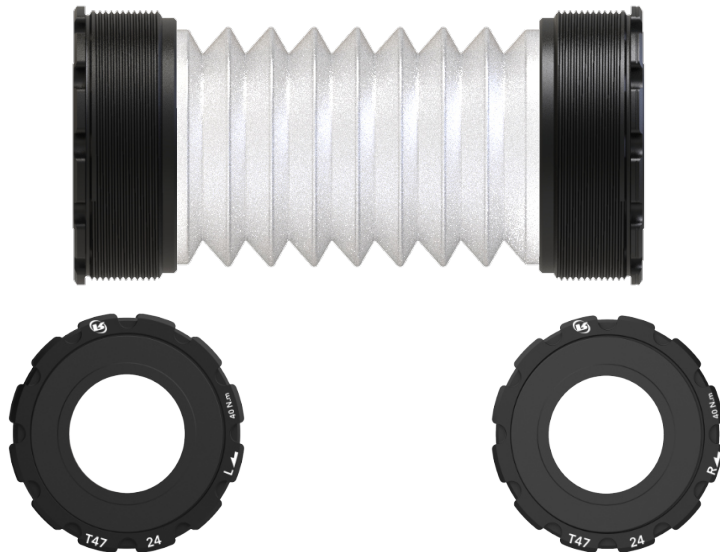




| | Steel | Ceramic |
|---------------------------------|--------|---------|
| Weight (Spring sleeve included) | 99.5 g | 93 g |

Axle compatibility

| | |
|------|------------------------------------|
| ROAD | 24 mm |
| MTB | 24 mm (Shimano® Cranks compatible) |

Frame compatibility

| | ROAD | MTB |
|--|--|--|
|  |  |  |
| T47 | 85.5 mm 86.5 mm | 89.5 mm 92 mm |

- Read the spacer chart